

# CATALOGO STRUMENTI

## Ricerca & Sviluppo

### PROVE E VERIFICHE

PROVA RIGIDITA' E ISOLAMENTO



TECNOLOGIA

**HIOKI**

asita

TECNOLOGIE DI MISURA



# INDICE

## PROVE E VERIFICHE

Prova Rigidità Dielettrica ed Isolamento .....p 3

3174 .....p 3

## STRUMENTI **R&S**

### MISURE PRIMARIE

- IMPEDENZIMETRI
- PONTI LCR
- OHMETRI - MICROHMETRI - MILLIOHMETRI - MEGA-OHMETRI - SUPER-MEGA-OHMETRI
- MULTIMETRI
- VOLTMETRI
- WATTMETRI

### MONITORAGGIO E CONTROLLO

- DATA LOGGER
- OSCILLOSCOPI REGISTRATORI

### PROVE E VERIFICHE ◀

- PROVA BATTERIA
- PROVA RIGIDITA' DIELETTICA ED ISOLAMENTO ◀
- PROVA ISOLAMENTO
- PROVA DI CONTINUITA'
- PROVA CORRENTE DISPERSA

### SENSORI e ACCESSORI

# HIOKI

## AC AUTOMATIC INSULATION/ WITHSTANDING HIESTER 3174



## Featuring contact check functionality

The effects of test lead wire breaks, erroneous test results caused by faulty contact, and fluctuations in test voltage caused by variations in the instrument's supply voltage on withstanding voltage and insulation resistance testing are well known.

The AC Automatic Insulation/Withstanding HiTester 3174 is a **low-cost solution featuring contact check functionality as well as a stabilized power supply** to prevent the reduced test reliability that can result from these issues.

To streamline production line test processes, the HiTester also features configuration of test parameters via RS-232C and reading of parameters from the EXT I/O interface.

CE

asita


TECNOLOGIE DI MISURA

# Improved Test Reliability

**NEW**

## Contact check function improves test reliability

The 3174's contact check function lets you **detect test lead wire breaks and faulty contact** during testing by sensing measurement issues in real time.

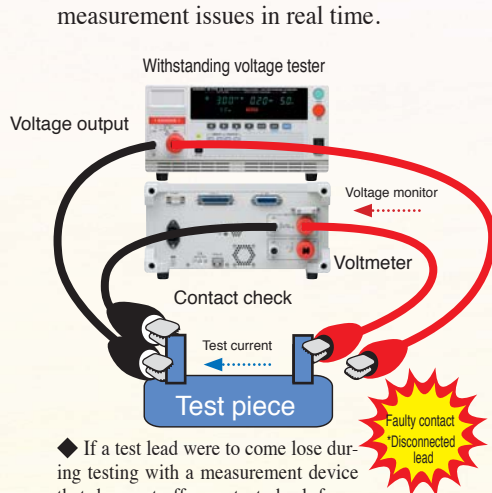


◆ If a test lead were to come loose during testing with a measurement device that does not offer contact check functionality, defective test pieces would be judged to be non-defective.

The 3174 improves test reliability by monitoring voltage to detect loose leads during testing and faulty wiring during measurement.

\*Since contact check is performed while testing is in progress, use of contact check functionality does not increase cycle time.

\*Requires an additional pair of H.V. TEST LEADS 9615.

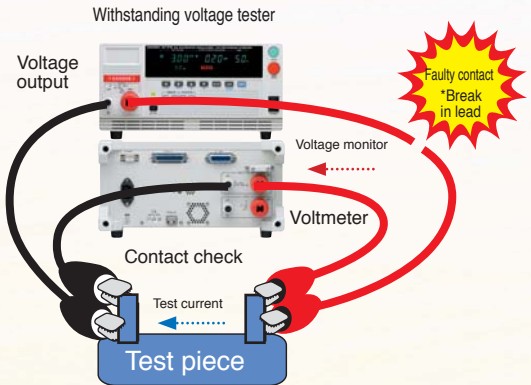

◆ If a test lead wire were to break during testing with a tester that does not offer contact check functionality, defective test pieces would be judged to be non-defective.

## DANGER lamp

Flashes a warning during testing and whenever high voltage is present at the terminals.

The DANGER lamp turns off when the voltage at the output terminals is no greater than AC 30 V or DC 60 V.



9613  
REMOTE CONTROL  
BOX (SINGLE)  
(option)

9614  
REMOTE CONTROL  
BOX (DUAL)  
(option)

## External switch

Enables start/stop control by means of the REMOTE CONTROL BOX (SINGLE) 9613 or REMOTE CONTROL BOX (DUAL) 9614. (The 9613 and 9614 are optional.)

## Test mode selection

Select from three test modes:

1. Manual test mode: W (withstand voltage testing) / I (insulation resistance testing)
2. Automatic test mode: W → I / I → W

Fluorescent display tube  
The display uses a bright, easy-to-read fluorescent tube.



**NEW**

## Judgment output at forced stop

The ability to obtain a judgment even after a forced stop increases testing freedom.

**NEW**

## Continued analytical testing after FAIL judgments

Test pieces can now be analyzed by means of detailed monitoring of the test current accompanying FAIL judgments.

## Ramp timer function

The ramp-up initial value, ramp-up and ramp-down time parameters can be set independently.

## True effective value display

## Eliminate the effects of supply voltage fluctuations

## Delay timer function

# Safe, Automated Operation

## Convenient

- Continuous full-auto withstanding voltage and insulation resistance testing

The 3174 lets you **set independent test conditions including test voltage for withstanding voltage and insulation resistance testing**, and you can perform these tests continuously. Press the W→I key to automatically perform withstanding voltage followed by insulation resistance tests, or press the I→W key to automatically perform insulation resistance followed by withstanding voltage tests.

## Safe

- Interlock function

Signal input from an external device such as an automatic tester can be used to disable output and prevent testing, **ensuring safety during automatic testing and other uses.**

**RS-232C**  
Enables remote control.

**Power cord inlet**

**Status out relay terminals**  
Maximum input voltage: AC 150 V, DC 30 V  
Maximum contact current: 0.5 A

**Contact check**  
LOW: A break in the lead is determined to have occurred when the check current is not detected.  
HIGH: A break in the lead is determined to have occurred when the contact check measurement voltage falls outside the range defined by the upper and lower thresholds.  
(Connectors are locked in place as shown on the left to prevent the leads from being disconnected.)  
\*Requires an additional pair of H.V.TEST LEADS 9615.

**Rear panel voltage output terminals**  
The rear panel terminals are connected at all times to the front terminals. When embedding the 3174 HITESTER inside an automatic tester, connections can be made via the rear panel terminals.

**Buzzer volume knobs**  
The 3174 provides separate volume adjustments for the PASS and FAIL judgment buzzers.

**External I/O connector (Signal lines have photocoupler isolation.)**

An OR operation applied to various enabled conditions determines whether relay terminal output is turned on.			
1. H.V.ON	Output voltage generation		
2. TEST	Testing in progress		
3. PASS	PASS state		
4. FAIL	FAIL state		
5. INT.LOCK	Interlocked state		
6. READY	Ready state		
7. EXT.CONT	Under external control		
8. POWER.ON	When the 3174 is on		

Pin	I/O	Signa	Function
1	OUT	READY	Low in ready state
2	OUT	L-FAIL	Low in FAIL state (lower bound)
3	OUT	U-FAIL	Low in FAIL state (upper bound)
4	OUT	PASS	Low in PASS state
5	OUT	TEST	Low in test state
6	OUT	H.V.ON	Low when voltage is present at output terminals
7	IN	EXT-E	When low, external I/O input signals are enabled
8	IN	START	When low, same function as START key
9	IN	STOP	When low, same function as STOP key
10	IN	INT.LOCK	Interlock on open
11	OUT	W-MODE	Low during withstanding voltage testing
12	OUT	I-MODE	Low during insulation resistance testing
13	OUT	W-FAIL	Low in FAIL state during withstand voltage testing
14	OUT	I-FAIL	Low in FAIL state during insulation resistance testing
15-18	IN	ISO.COM	Ground inputs for external devices
22-25	IN	MEM-0 to 3	Saved test selected pins
27	IN	MEM-E	When low, enables memory selected pins
28-29	OUT	MODE-0,1	Current test mode
33-36	OUT	ISO.DCV	Internal DC 15 V power supply (100 mA)

### Interface specifications

- EXT I/O** : Output signals  
Open collector output (with photocoupler isolation)  
All active low with a maximum load voltage of DC 30 V  
Maximum output current: DC 100 mA per signal  
Output saturation voltage: DC 1.5 V or less
- Input signals**  
All active low input (with photocoupler isolation)  
Maximum applied voltage: 30 V  
High level voltage: from DC 15 V to 30 V, or open  
Low level voltage: DC 5 V or less (-6 mA typ.)
- EXT SW** : Input signals (contact input)  
START, STOP, SW.EN (external switch terminal enable)
- Output signals**  
LED activation signal (maximum load current: 40 mA)

# AC AUTOMATIC INSULATION/WITHSTANDING HiTESTER 3174

## Withstanding Voltage Testing

### 【 Test Voltage 】

Output voltage	: AC 0.2 to 5 kV (50/60 Hz), single-range output
Voltage output method	: PWM switching method (0 V start; voltage can be changed while generating output)
Voltage specification method	: Digital (setting resolution: 0.01 kV)
Output voltage accuracy	: $\pm 1.5\%$ of setting $\pm 20$ V
Maximum rated output	: AC 100 VA (5 kV/20 mA) continuous rating
Transformer capacity	: 100VA
Voltmeter	: True effective value display Digital meter: AC 0 kV to 5.00 kV Accuracy: $\pm 1.5\%$ rdg. (1,000 V or less, $\pm 15$ V)
Output waveform	: Sine wave
Voltage change rate	: 15% or less (converges to setting within 1 s during change from maximum rated load to no load)
Distortion factor	: 5% or less (tester impedance during measurement with 5 kV output under 40 M $\Omega$ load)
Frequency	: 50/60Hz ( $\pm 0.2\%$ )

### 【 Current Detection 】

Current measurement range	: 0.01 mA to 20 mA (2 ranges)
Measurement range	: 10mA/ 20mA
Indicated value	: True effective value display
Measurement ranges and resolutions	: 0.00 mA to 10.00 mA, 0.01 mA (10 mA range) 0.0 mA to 20.0 mA, 0.1 mA (20 mA range)
Measurement accuracy	: $\pm 2\%$ rdg. $\pm 0.05$ mA (10 mA range) $\pm 2\%$ rdg. $\pm 0.5$ mA (20 mA range)

## Insulation Resistance Measurement

### 【 Test Voltage 】

Rated voltage	: DC 500 V/1,000 V (positive polarity)
Unloaded voltage	: 1 to 1.2 times rated voltage
Rated measurement current	: 1 to 1.2 mA
Short-circuit current	: 4 to 5 mA (500 V), 2 to 3 mA (1,000 V)
Measurement range	: 0.2 to 2,000 M $\Omega$ (500 V), 0.5 to 2,000 M $\Omega$ (1,000 V)
Guaranteed accuracy ranges/accuracies	: 0.5 to 999 M $\Omega$ (500 V), 1 M $\Omega$ to 999 M $\Omega$ (1,000 V): $\pm 4\%$ rdg. 1,000 M $\Omega$ to 2,000 M $\Omega$ : $\pm 8\%$ rdg.
Measurement resolution	: 0.01 M $\Omega$ (0.20 M $\Omega$ to 19.9 M $\Omega$ ) 0.1 M $\Omega$ (20.0 M $\Omega$ to 199.9 M $\Omega$ ), 1 M $\Omega$ (200 M $\Omega$ to 2,000 M $\Omega$ )
Measured resistance ranges	: 2 M $\Omega$ , 20 M $\Omega$ , 200 M $\Omega$ , 2,000 M $\Omega$ (500 V) 4 M $\Omega$ , 40 M $\Omega$ , 400 M $\Omega$ , 2,000 M $\Omega$ (1,000 V)

## General Specifications

Display	: Fluorescent display tube (digital display)
Monitor functions	: Output voltage, detected current, insulation resistance
Monitor period	: 2 times per second, minimum
Operating temperature range	: 0°C to 40°C, 80% RH or less (non-condensing)
Storage temperature range	: -10°C to 50°C, 90% RH or less (non-condensing)
Temperature and humidity range for guaranteed accuracy	: 23 $\pm$ 5°C, 80% RH or less (non-condensing) (With warm-up period of at least 10 min)
Accuracy guaranteed	: 1 year
Post-adjustment accuracy guaranteed	: 1 year
Supply voltage	: AC 100 to 240 V Designed to tolerate voltage fluctuations of $\pm 10\%$ of the rated supply voltage
Power supply frequency	: 50Hz/ 60Hz
Withstanding voltage	: Power supply to chassis: 1.39 kV at 10 mA for 15 s
Maximum rated power	: 200VA
Dimensions	: Approx. 320 (W) $\times$ 155 (H) $\times$ 395 (D) mm (excluding protruding parts)
Weight	: Approx. 15 kg
Applicable standards	: EMC: EN61326 Class A, EN61000-3-2, EN61000-3-3, Safety: EN61010
Included accessories	: H.V.TEST LEAD 9615 (high voltage side and return, 1 each), Power cord, Instruction manual, Disconnection prevention plate

## Timers

Setting range	: 0.3 to 999 s
Operation	: When set to on: Display counts down from the set time after start. When set to off: Display indicates time elapsed since start.
Setting resolution/accuracy	: 0.1 s (0.3 to 99.9 s) $\pm 50$ ms 1 s (100 to 999 s) $\pm 0.5$ s

### 【 Ramp Timers 】 (Withstand voltage testing)

Setting range	: 0.1 to 99.9 s: Ramp-up and ramp-down can be set independently.
Operation	: Ramp-up: The output voltage increases linearly from the initial voltage to the test voltage over the ramp-up time. Ramp-down: The output voltage decreases from the set voltage to 0 V over the ramp-down time after the test time elapses, and the display counts down from the set time. *The actual ramp-up waveform varies with the load due to the analog response delay.
Setting resolution	: 0.1s

### 【 Delay Timers 】 (Insulation resistance testing)

Setting range	: 0.1 to 99.9 s
Setting resolution	: 0.1 s

## Decision Function

Decision method	: Window comparison method with upper and lower bound settings (digital specification)
Decision results	: UPPER-FAIL: The measured current (measured insulation value) exceeded the specified upper threshold. PASS: The measured current (measured insulation value) fell within the range defined by the specified upper and lower thresholds. LOWER-FAIL: The measured current (measured insulation value) was less than the specified lower bound. UPPER LOWER-FAIL: A testing error occurred, for example due to a failure to generate the set voltage.
Decision processing	: Display, buzzer, and EXT I/O signal output is generated according to each decision result.
Setting range	: AC withstanding voltage: 0.1 to 20.0 mA (upper threshold), 0.1 to 19.9 mA (lower threshold) DC insulation: 0.2 to 2,000 M $\Omega$ (500 V) or 1.0 to 2,000 M $\Omega$ (1,000 V) for both upper and lower thresholds
Setting resolution	: AC withstanding voltage: 0.1 mA DC insulation: 0.01 M $\Omega$ (0.2 to 2.00 M $\Omega$ ), 0.1 M $\Omega$ (2.10 to 20.0 M $\Omega$ ), 1 M $\Omega$ (21.0 to 200 M $\Omega$ ), 10 M $\Omega$ (210 to 2,000 M $\Omega$ )

## Contact Check

Voltmeter accuracy	: Detection method: Average value detection/effective value conversion Accuracy: Setting $\pm 50$ V *Inaccuracy may increase when the waveform is distorted.
Decision results	: Enables the contact check function (does not increase cycle time). LOW: A break in the lead is determined to have occurred when the check current is not detected. HIGH: Upper and lower thresholds for the check detection voltage can be set. A break in the lead is determined to have occurred when the contact check measurement voltage falls outside the range defined by the upper and lower thresholds.
Voltage setting range	: Withstanding voltage testing: 0.20 kV to 5.0 kV (0.01 kV resolution; applies to both upper and lower thresholds) Insulation resistance measurement: Upper threshold of 600 V and lower threshold of 500 V (during 500 V measurement); upper threshold of 1,200 V and lower threshold of 1,000 V (during 1,000 V measurement) (both fixed)

## Model

### AC AUTOMATIC INSULATION/WITHSTANDING HiTESTER 3174

Model No. (Order Code): 3174

## Options

SAFETY TEST DATA MANAGEMENT SOFTWARE	9267
REMOTE CONTROL BOX(SINGLE)	9613
REMOTE CONTROL BOX(DUAL)	9614
H.V.TEST LEAD	9615
RS-232C CABLE (9-pin to 9-pin/cross/1.8 m)	9637
RS-232C CABLE (9-pin to 25-pin/cross/1.8 m)	9638

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

**HIOKI**  
HIOKI E. E. CORPORATION

TECNOLOGIA

# HIOKI

Le tecnologie di misura Hioki sono ampiamente e globalmente utilizzate per manutenzione, controllo qualità, ricerca e sviluppo, in ambito industriale, aziendale e delle infrastrutture, contribuendo alla sicurezza ed alla protezione del nostro vivere quotidiano.

L'azienda supporta inoltre lo sviluppo delle tecnologie di nuova generazione nei settori automotive ed energie rinnovabili, favorendo la diffusione di prodotti di elevata qualità a prezzi competitivi.

La mission di Hioki è di produrre e divulgare tecnologie di misura volte a proteggere la sicurezza delle persone e consentire, attraverso il supporto alla ricerca, il progresso della scienza e della tecnica.



## I numeri:

10% del fatturato investito in R&S

250 ingegneri impiegati nella ricerca

30 nuovi prodotti all'anno

100 brevetti depositati all'anno

1200 prodotti a catalogo

800.000 pezzi venduti all'anno

50 ppm (pezzi per milione) indice di difettosità

10.000 prove di apertura e chiusura per testare la durata dei toroidi

1 metro di caduta per testare la resistenza degli strumenti

Made in Japan



asita  
TECNOLOGIE DI MISURA



s.r.l

Via Malpighi, 170  
48018 Faenza (RA) - Italy  
[www.asita.com](http://www.asita.com)  
[asita@asita.com](mailto:asita@asita.com)  
+39 0546 620559  
P.IVA 00202980397